
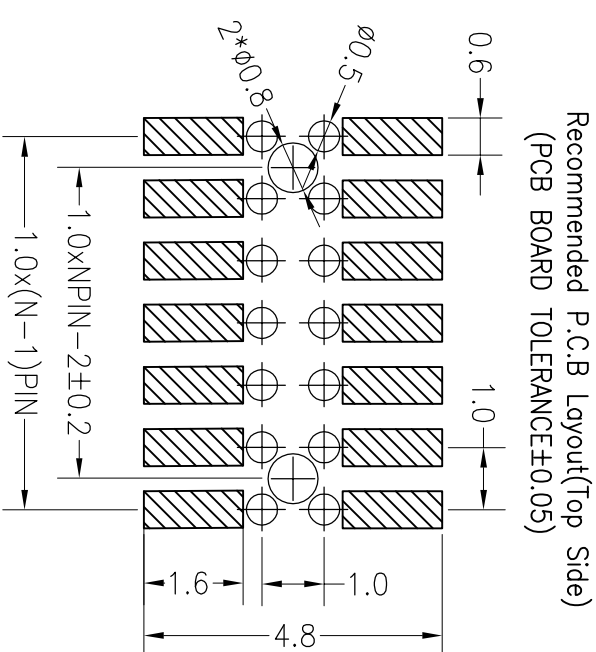


SPECIFICATIONS

Rated Current: 0.75AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

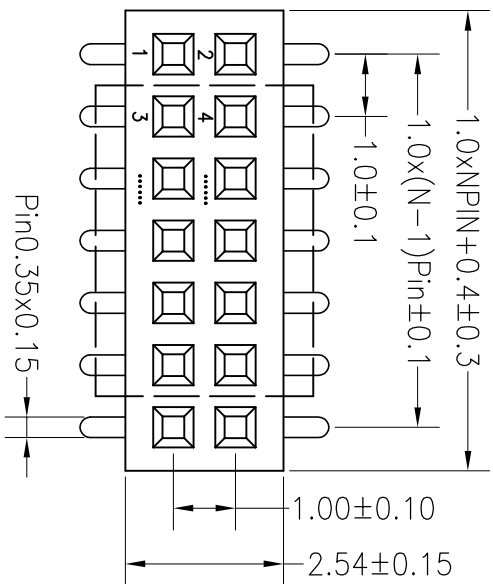



Ordering Information

2620 02 XX X XX M U X 01

No. of Pins: 2*2~2*50
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA6
 E=BK-PA9T
 F=BK-LCP

Post: W=With Post, N=W/O Post
 Contact Plating:
 G0: Gold Flash
 G1: 3U" Gold
 G2: 5U" Gold
 G3: 10U" Gold
 G4: 15U" Gold
 G5: 30U" Gold
 S0: Gold Flash/Tin
 SK: Tin

Packing:
 A=Troy
 T=Tube
 O=Pe
 R=Tape&Reel
 P=Tube&Cap

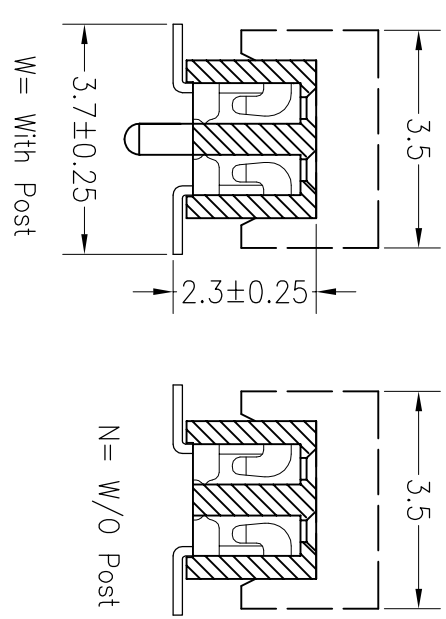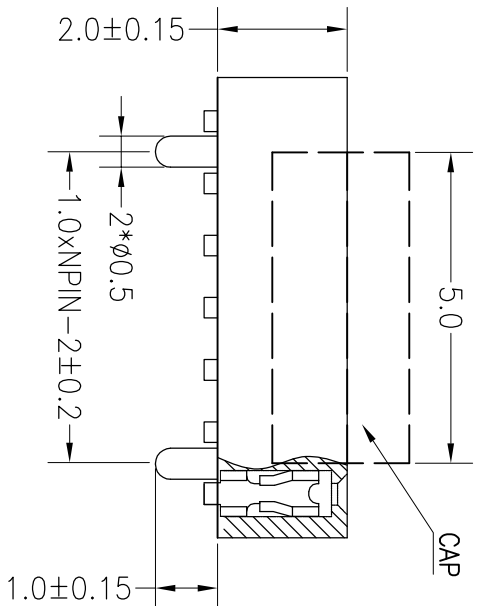

OPERATION		DRAW		SCALE		FIT		TITLE:	
X.X	±0.30	Y.YuSheng	18.03.28	UNIT	mm	A4	1/1	PART NO.: 262002XXXXXXXXMUX01	
X.XX	±0.20	CHECK		SIZE				Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892	
X.XXX	±0.10			SHEET	1/1			SHENZHEN JINLING ELECTRONIC CO.,LTD	
ANGLE	±3°	APPROVE		PROJ.				深圳市锦凌电子有限公司	
DATE	2018.03.28	CHANGE		DIM				SHENZHEN JINLING ELECTRONIC CO.,LTD	
REV	A0	MODIFICATION DESCRIPTION		TOL				1.0PF H2.0mm 2XNP SMT W3.7	
1								262002XXXXXXMUX01	