
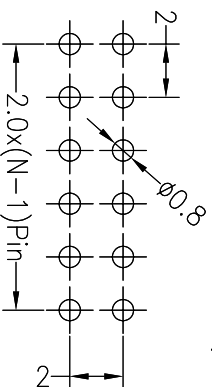


SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)


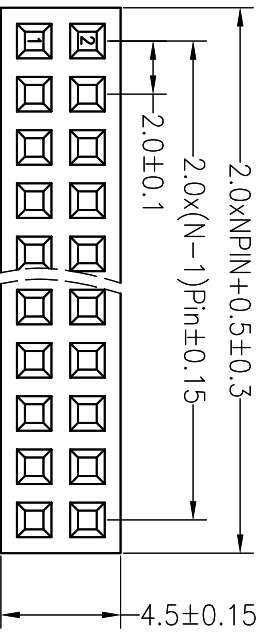


Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

2343 02 XX X N XX S U X 04

- No. of Pins Per Row: 2*40
- Insulator Material Option:
 - A=BK-PBT
 - B=BK-PA66
 - C=BK-PA6T
 - D=BK-PA46
 - E=BK-PA9T
 - F=BK-LCP
- Contact Plating:
 - G1: Gold Flash
 - G2: 1.5U" Gold
 - G3: 2U" Gold
 - G4: 3U" Gold
 - G5: 5U" Gold
 - S0: Gold Flash/Tin
 - SN: Tin
- Packing:
 - O=PE Bag
 - A=Tray
 - T=Tube
 - P=Tube+Cap
 - R=Reel+Cap
 - M=Reel+Mylar

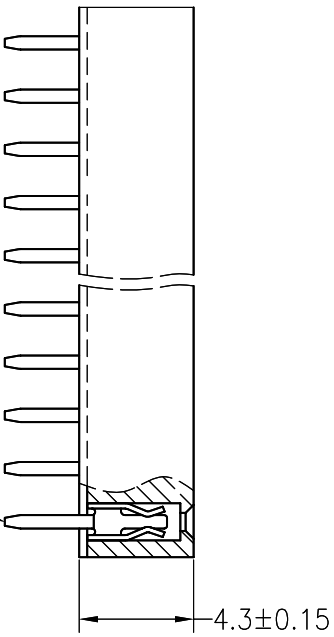

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	YYS/SHENG	12.07.23	SCALE		FIT	PROJ.	PART NO.	TITLE:
				UNIT	SIZE				ANGLE	TOL				
A0	2012.07.23	NEW DRAWING		X.X	±0.30				mm	A4	1/1		234302XXXXXSUX04	2.00PF H4.3mm 2xNpin 180° W4.50

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892