
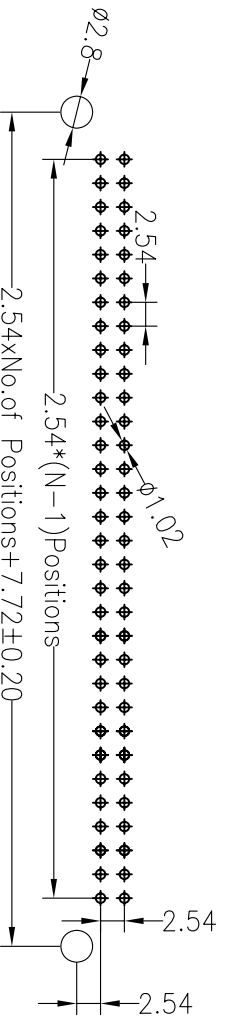
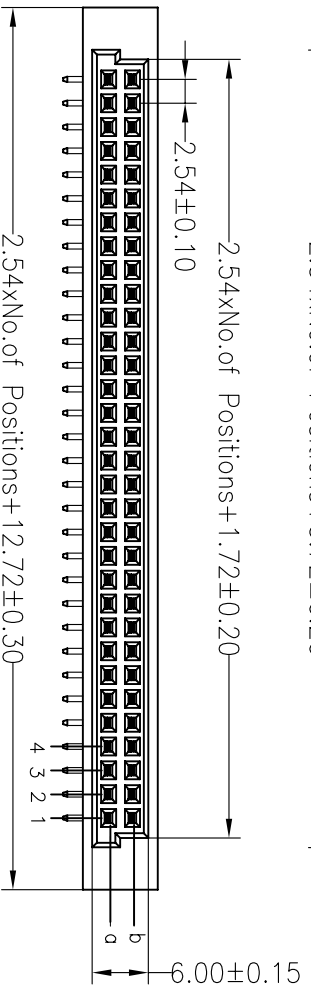

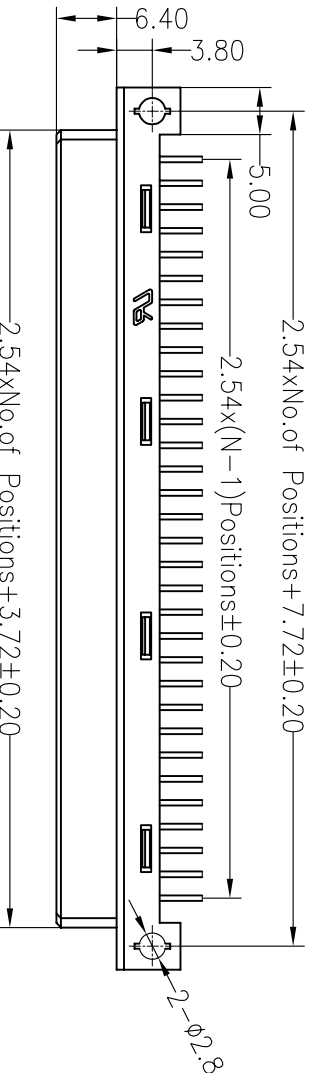


SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

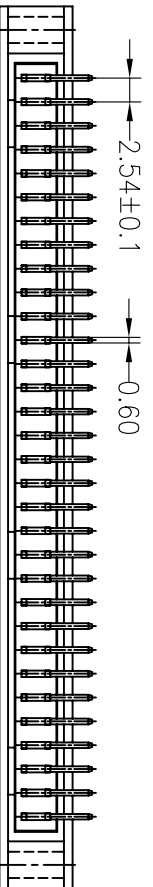

Ordering Information

35112 XX A F R XX BN01

No.of Pins: 16-64P
 Contact Type: M=male, F=Female
 Contact Plating: G0:Gold Flash, S2:1.5U" Gold, S3:2U" Gold, S4:3U" Gold, S5:5U" Gold, S0:Gold Flash/Tin, SN:Tin

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YTYuSheng	14.09.16	UNIT	mm	mm	A4	SIZE	A4
X.XX	±0.20	CHECK		SHEET	1/1	35112XXAFRXXBN01			
X.XXX	±0.10	APPROVE		PROJ.		SHENZHEN JINLING ELECTRONIC CO.,LTD			
Angle	±3°			深圳市锦凌电子有限公司					
DIM	TOL			SHENZHEN JINLING ELECTRONIC CO.,LTD					
				Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992					
				Standard					
				Alternate					
				35112XXAFRXXBN01					
				款式插座 母座 90度 2xNPIN 成品系列图					

增加 U 标识
 NEW DRAWING
 MODIFICATION DESCRIPTION

REV	DATE	CHANGE
A0	2014.04.11	
1		