



FILE NO: E382810

**SPECIFICATIONS**





Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 10 seconds)

**Ordering Information**

2271 02 XX X N XX R Y X 01

No. of Pins Per Row: 2\*40  
 Insulator Material Option:  
 A=BK-PBT  
 B=BK-PA66  
 C=BK-PA6T  
 D=BK-PA46  
 F=BK-LCP  
 Post: W=With Post, N=W/O Post  
 Contact Plating:  
 G0: Gold Flash  
 G2: 5U" Gold  
 G3: 10U" Gold  
 G4: 15U" Gold  
 G5: 30U" Gold  
 S0: Gold Flash/Tin  
 SN: Tin  
 Packing:  
 O=PE Bag  
 A=Troy  
 T=Tube  
 P=Tube+Cap  
 R=Reel+Cap  
 M=Reel+Mylar

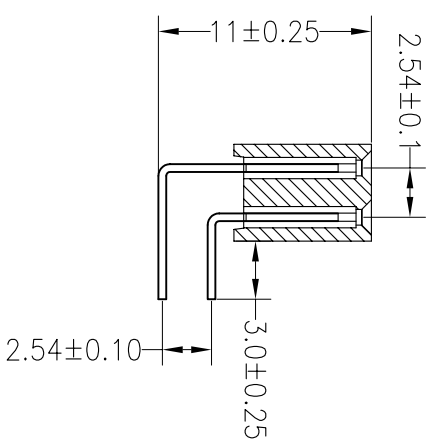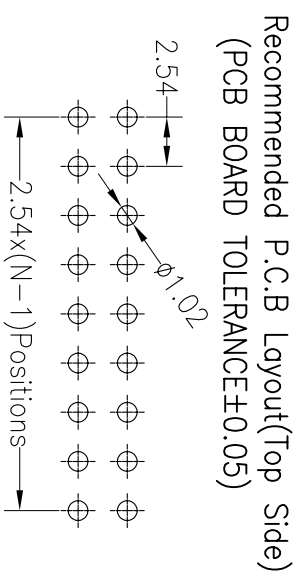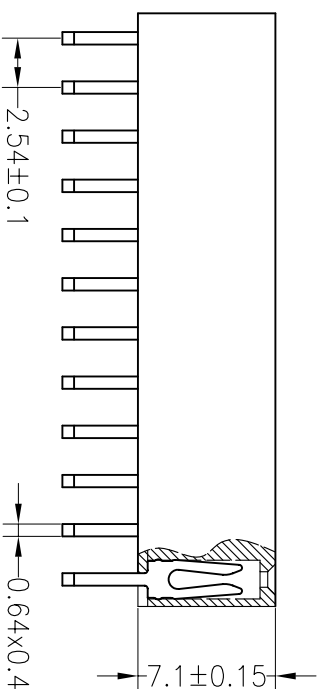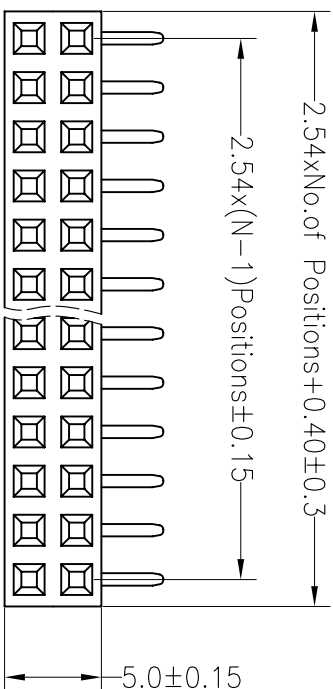

OPERATION		DRAW		YTYuSheng		15.04.25		SCALE		FIT		PART NO.	
X.X	±0.30							UNIT	mm				227102XXXXXXRYX01
X.XX	±0.20	CHECK						SIZE	A4	SHEET		1/1	
X.XXX	±0.10							SHEET	1/1	PROJ.		◆	TITLE:
REV	DATE	MODIFICATION DESCRIPTION		CHANGE				APPROVE				2.54PF H7.1mm 2xNpin 90°	
1													

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992