

SPECIFICATIONS

Rated(额定参数): 125V,4A
 Dielectric strength(抗电强度): AC1250V/1 Minute
 Insulation Resistance(绝缘电阻):5000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):20~28AWG
 Strip length(剥线长度):8mm
 Temp. range(操作温度):-40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s





Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)

PITCH RANGE IN MM	NOMINAL DIMENSION RANGE IN MM					
	OVER	OVER	OVER	OVER	OVER	OVER
TO 6	10	TO 10	30	TO 60	100	OVER 150
TO 10	TO 24	TO 30	TO 60	TO 100	TO 150	TO 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70 ±1.00

Ordering Information

JL15EDGKD - 250 XX X X 1

Pitch 250=2.50PH
 No. of pins 2P,3P,4P~24P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey
 Packing
 O=Pe bag
 T=Tube
 A=Tray

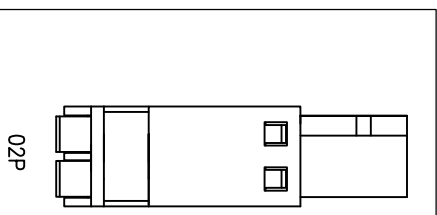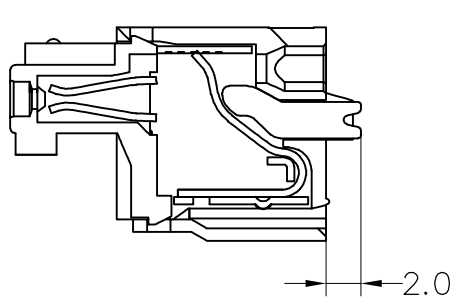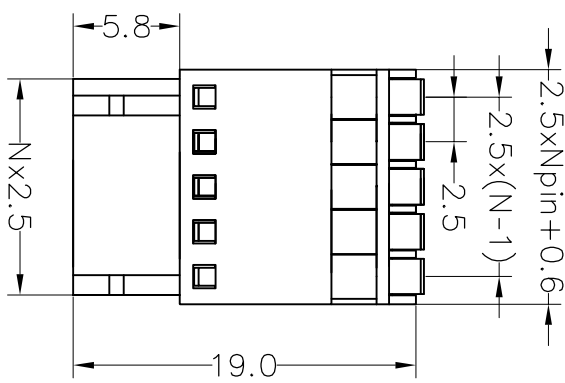

OPERATION		DRAW		SCALE		FIT		PART NO.	
XX	±0.30	yiyusheng	19.08.28	UNIT	mm	A4	1/1	JL15EDGKD-250XXXX1	
X:XX	±0.20	CHECK		SIZE					
X:XXX	±0.10	APPROVE		SHEET					
Angle	±3'			PROJ.					
DIM	TOL								
CHANGE									
MODIFICATION DESCRIPTION									
DATE									
REV									
A0	2019.08.28	NEW DRAWING						2.50 Pitch Female Pluggable Terminal Blocks	
1									

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992